



LIGHTING • FIRE & CO DETECTION




# RADIO FREQUENCY DEAF AID KIT

WITH STROBE, VIBRATING PAD & AC/DC ADAPTOR

## FEATURES

- Additional protection when sound alone may not be enough
- Compatible with Hispec RF10-PRO smoke, heat and/or CO alarms
- Mains powered with rechargeable battery back-up (must be replaced after 5 years)
- Will detect a fault or low battery warning with any smoke alarm or CO alarm with any RF10-PRO paired alarm
- Suitable for wall mounting with 2 screw fixings or free standing.

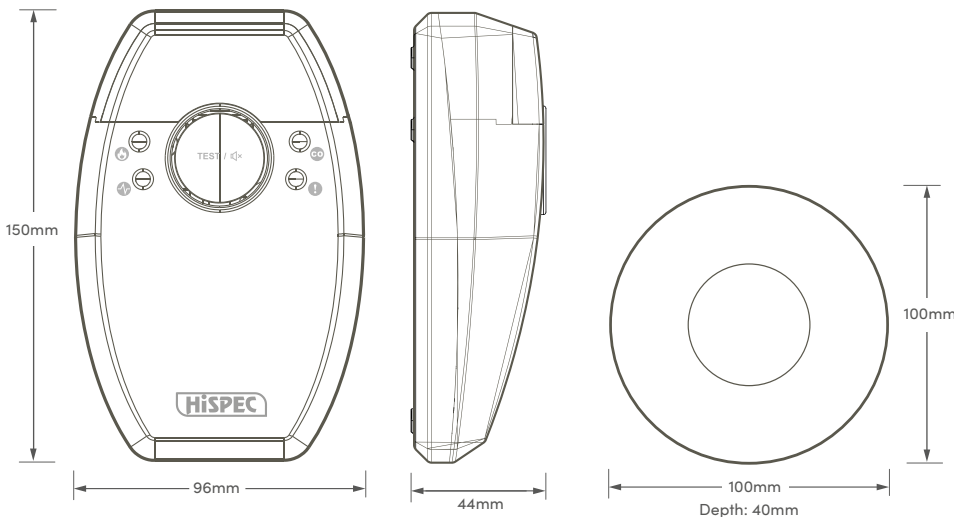

**RFPRO**

## TECHNICAL INFORMATION

Power Source:	220-240 Vac~ 50-60Hz with lithium battery Back-up (battery included)
Temperature Ambient:	5°C - 40°C
Ambient Humidity:	Up to 90% RH
Max. Wireless interconnection:	20
Weight:	762g
Approvals:	EN 301 220-2 V 2.4.1 EN 301 489-3 V 1.6.1 EN 301 489-1

**Product Code:** HSSA/DAK/RF10-PRO



hispec.co.uk

